
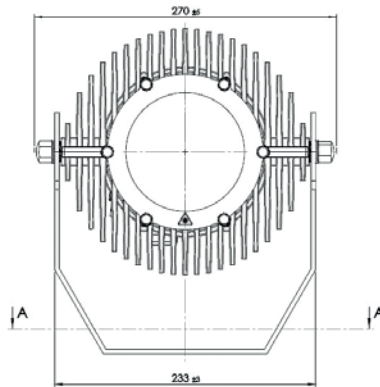


# HOLLAND STANDARD

FL45

## FL45 LED FLOODLIGHT

<b>Application</b>	Decks and holds, ramps, industrial and sport areas
<b>Protection degree</b>	IP66/67
<b>Housing</b>	Seawater resistant Aluminum with Stainless Steel 316L
<b>Temperature range</b>	-40°C up to +55°C
<b>Light output</b>	12.000 (24V) or 15.000 Lm (230V)
<b>Pane</b>	Safety glass diffusor
<b>Cable entry</b>	1xM20x1.5 brass nickel plated D7-13mm
<b>Light source</b>	LED White - 125W
<b>Operating voltage</b>	Inbuild driver for 110 to 240 V 50/60Hz
<b>Mounting</b>	Stainless steel 316L mounting bracket holes, Ø 10,5/14mm
<b>Beam angles</b>	SB 12° - NB 28° - MB 40° - WB 61° - XWB 80°

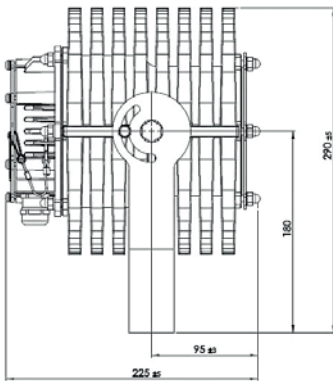


**PART NO.**

- [FL450X2000](#) 15000 110-240 125W SB
- [FL450X4000](#) 15000 110-240 125W NB
- [FL450X6000](#) 15000 110-240 125W MB
- [FL450X8000](#) 15000 110-240 125W WB
- [FL450X0000](#) 15000 110-240 125W XWB

**WEIGHT**

- 8 kg
- 8 kg
- 8 kg
- 8 kg
- 8 kg

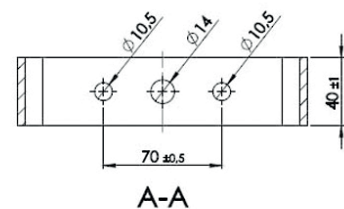

**24V**

- |   |      |             |
|---|------|-------------|
| <a href="#">FL45112000</a> 12000 840 24 125W SB | 8 kg | X = 1 4000K |
| <a href="#">FL45116000</a> 12000 840 24 125W MB | 8 kg | X = 2 5000K |
| <a href="#">FL45118000</a> 12000 840 24 125W WB | 8 kg | X = 3 3000K |